




eman

KARO HALILARI



SKYPER CARPET TILE



SKYPER

EARTHY ELEMENTS

SKYPER

Epitome of Sophistication




50 X 50 cm


SPECIFICATION

Style Name	:	Skyper
Construction	:	Scroll loop pile
Pile	:	%100 Nylon (PA6)
Dye method	:	100% Solution Dyed
Gauge	:	1/10
No. of tufts	:	± 208820/m ²
Pile Weight	:	550 gr/m ² ± 5%
Pile Height	:	3.0 mm ± 5%
Backing	:	Non-Woven Polyflex
Tile Size	:	50 cm x 50 cm
Total weight	:	4100 gr/m ² ± 7,5%
Total thickness	:	5,8 mm ± 5%
Tiles per box	:	20
Use classification	:	33
Castor chair test	:	A - intensive use
Abrasion	:	pass
Vettermann test	:	pass
Thermal resistance	:	R10 = 0,0666 m ² K/W
Dimensional stability	:	pass
Luxery/Comfort	:	LC1
Anti-slip property	:	R13
Sound insulation	:	ΔLw = 23 Db
Sound Absorption	:	aw = 0.15 (H)
Static loading	:	anti-static
Electrical resistance	:	4,2 x 10 ¹² Ω
Reaction to fire	:	Light
		Bfl – s1
		8


— INSTALLATION METHOD




ASHLAR




BRICK




DIRECTIONAL




QUARTER TURN




6578




6575




6574




6546



6545



6577



6576




6549




6547




6544




6558




6633



6653



6663



6683

My Floor Carpet Flooring Solutions
acoustic carpet tile

www.myfloor.com.tr




SKYPER



6547




SKYPER



6574




SKYPER



6576




SKYPER



6653



SKYPER



6578



SKYPER




6577



6575




SKYPER



6663




SKYPER



6683



SKYPER




6633





NICE Serisi

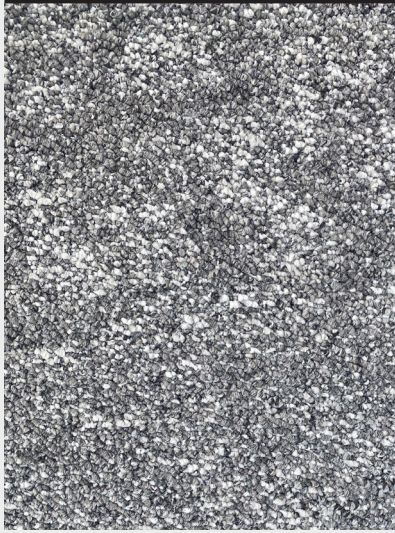

NICE 3174

0 m²



NICE 3176

305 m²



NICE 3177

130 m²



NICE 3178

610 m²



NICE 3186

0 m²

Karo Halılar NICE Serisi



QUALITY

Product Definition	ISO 2424	Multiroll
Gauge		1/10"
No. of Tufts	ISO 1763	
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	690 gr/m ² ± 5%
Pile Height	ISO 1765	3 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex with non-woven fabric
Total Thickness	ISO 1765	5 mm ± 5%
Total Weight	ISO 8543	4200 gr/m ² ± 7,5%
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7") 20
Tiles per box		Contract Class 32
Use Classification	EN 1307	Pass
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-S1 Low Radius

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

SAMOS Serisi



SAMOS 575

790 m²



SAMOS 577

85 m²

Karo Halılar SAMOS Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	$\pm 177750/m^2$ (-7.5% . +10%)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	660 gr/m ² $\pm 5\%$ (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm
Primary Backing	ISO 2424	non-woven
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.0 mm
Total Weight	ISO 8543	3660 gr/m ² ($\pm 15\%$)
Tile Size	EN 986	50 x 50 cm ($\pm 0.2\%$)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-s1

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

SPARTA Serisi



SPARTA 2778

280 m²



SPARTA 27278

520 m²

Karo Halılar SPARTA Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 173.360/m ²
Pile Fibre	ISO 2424	100% PA SDN
Pile Weight	ISO 8543	510 gr/m ² ± 5%
Pile Height	ISO 1765	3.5 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven-Colback
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.2 mm ± 5%
Total Weight	ISO 8543	3800 gr/m ² ± 7,5%
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Heavy Contract Class 33
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Bfl-S1

COLOUR FASTNESS PROPERTIES

Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	5.0
Rubbing, Wet		5.0
Shampoo		5.0
Water	ISO 105 E01	4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	


Best results are obtained when cleaned with a dry shampoo method. Directional grooves are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

MALAGA Serisi



MALAGA 575

4820 m²

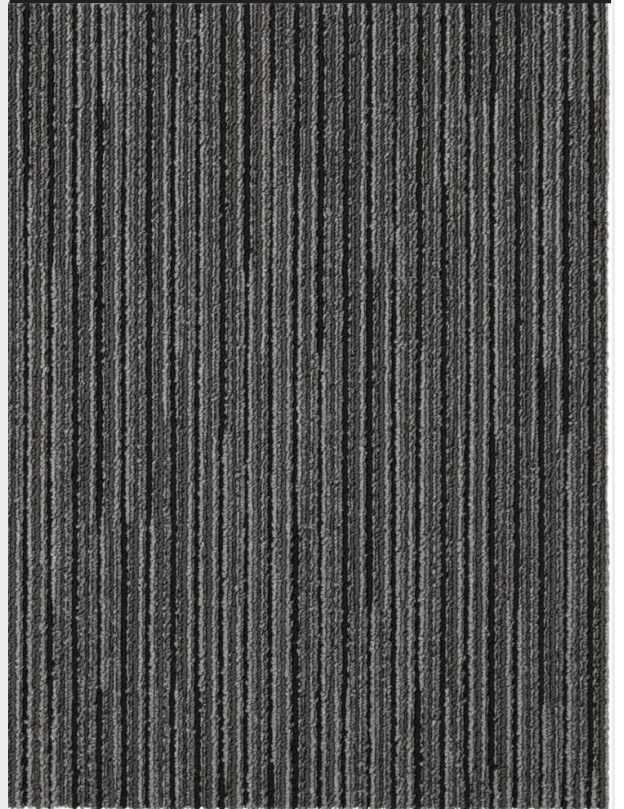

MALAGA 577

320 m²

Karo Halılar MALAGA Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	$\pm 177750/m^2$ (-7.5% . +10%) 100%
Pile Fibre	ISO 2424	Polypropylene
Pile Weight	ISO 8543	660 gr/m ² $\pm 5\%$ (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm $\pm 5\%$
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyfex non-woven fabric
Total Thickness	ISO 1765	6.0 mm $\pm 5\%$
Total Weight	ISO 8543	3800 gr/m ² $\pm 7,5\%$ (± 109 oz/yd ²)
Tile Size	EN 986	50 x 50 cm ($\pm 19.7''$ x $19.7''$)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-S1

COLOUR FASTNESS PROPERTIES


Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

SANTORINI Serisi

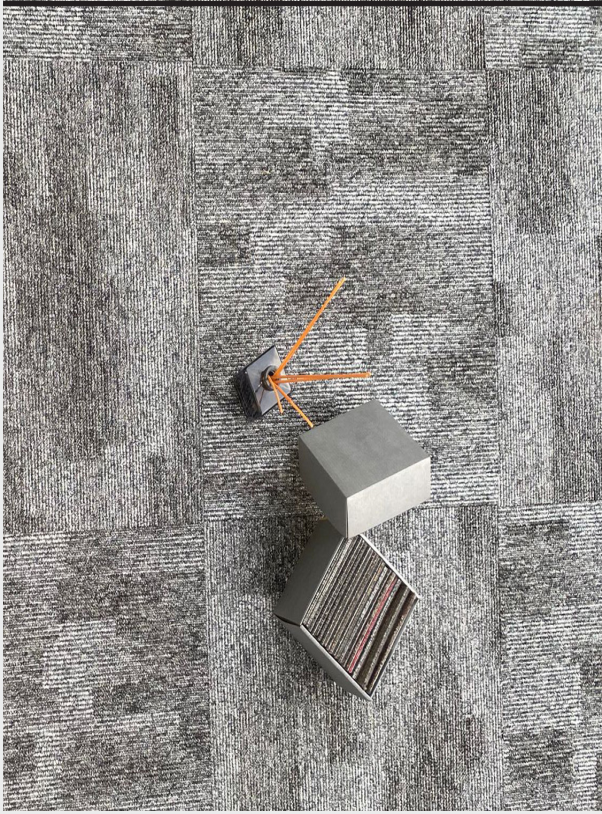

SANTORINI 3276

470 m²



SANTORINI 3278

190 m²

Karo Halılar SANTORINI Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	$\pm 177750/m^2$ (-7.5% . +10%)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	660 gr/m ² $\pm 5\%$ (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm
Primary Backing	ISO 2424	non-woven
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.0 mm
Total Weight	ISO 8543	3660 gr/m ² ($\pm 15\%$)
Tile Size	EN 986	50 x 50 cm ($\pm 0.2\%$)
Tiles per box		20
Use Classification	EN 1307	Contract Class 32
Abrasion	ISO 10361	Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability		Pass
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	

COLOUR FASTNESS PROPERTIES


Light	ISO 105 B02	>5.0
Rubbing, Dry	ISO 105 X12	>4.0
Rubbing, Wet		
Shampoo		
Water	ISO 105 E01	>4.0

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	


Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

TAMPA Serisi

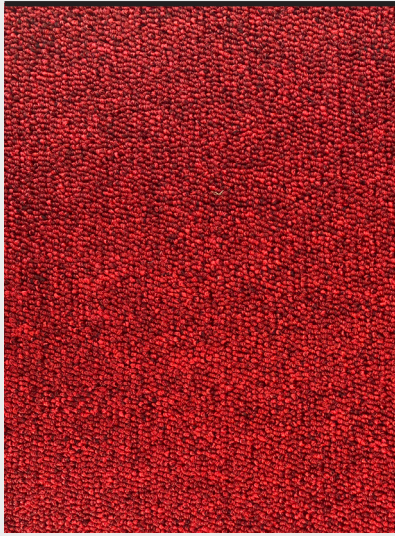


TAMPA 1120

120 m²

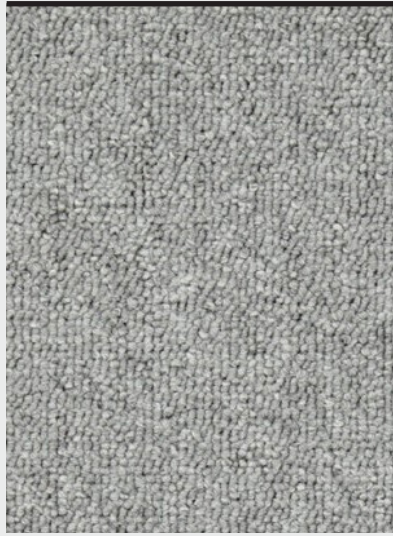


TAMPA 1174

170 m²

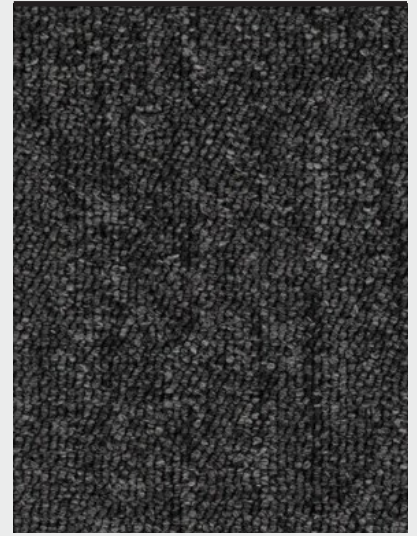


TAMPA 1178

1060 m²

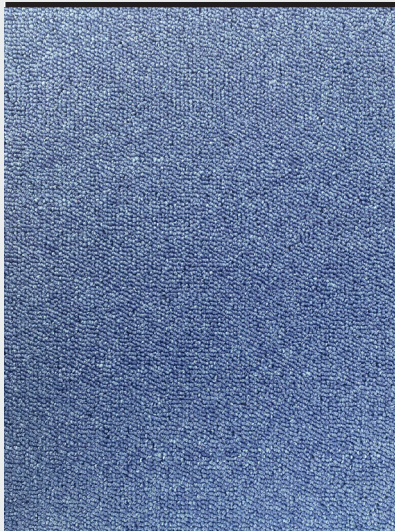

TAMPA 1181

130 m²

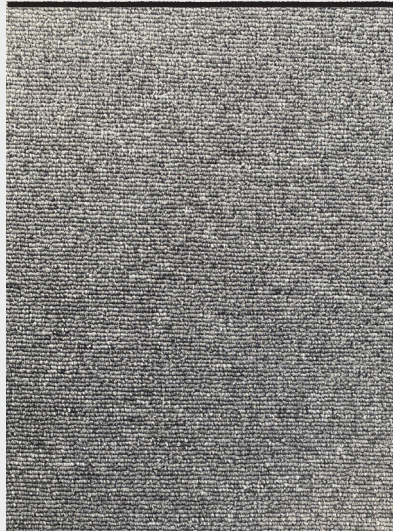

TAMPA 1182

40 m²

Karo Halılar TAMPA Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	$\pm 168000/m^2$ (163043/yard ²) 100%
Pile Fibre	ISO 2424	Polypropylene
Pile Weight	ISO 8543	$360 \text{ gr}/m^2 \pm 5\%$ ($\pm 10 \text{ oz}/yd^2$)
Pile Height	ISO 1765	3.0 mm $\pm 5\%$
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyfex non-woven fabric
Total Thickness	ISO 1765	6.0 mm $\pm 5\%$
Total Weight	ISO 8543	$3790 \text{ gr}/m^2 \pm 7,5\%$ ($\pm 109 \text{ oz}/yd^2$)
Tile Size	EN 986	50 x 50 cm ($\pm 19.7'' \times 19.7''$)
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 32
Abrasion	ISO 10361	Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability		Pass
Thermal Isolation		0,10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Cfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8

GENERAL

Recommended Maintenance
Pile Direction
Laying Instructions

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

TAMPA STRIPE Serisi



TAMPA STRIPE 1478 **0 m²**



TAMPA STRIPE 1520 **260 m²**



TAMPA STRIPE 1575 **585 m²**



TAMPA STRIPE 1586 **0 m²**

Karo Halılar TAMPA STRIPE Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 168000/m ² (163043/yd ²)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	360 gr/m ² ± 5% (± 10 oz/yd ²)
Pile Height	ISO 1765	3.0 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyex non-woven fabric
Total Thickness	ISO 1765	6.0 mm ± 5%
Total Weight	ISO 8543	3790 gr/m ² ± 7,5% (± 109 oz/yd ²)
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7")
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 22
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	
Hot Metal Nut Test	EN130501-1	Cfl-S1 Low Radius

COLOUR FASTNESS PROPERTIES


Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.


MULTI STRIPE Serisi

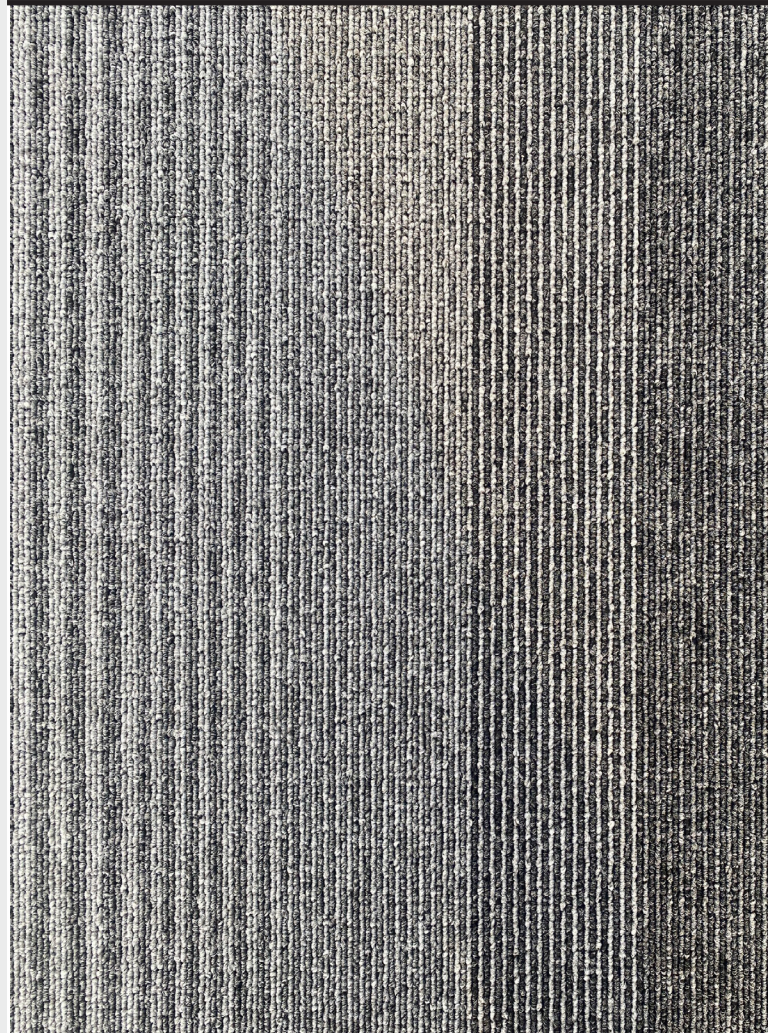

MULTI STRIPE 7478

2035 m²

Karo Halılar MULTI STRIPE Serisi

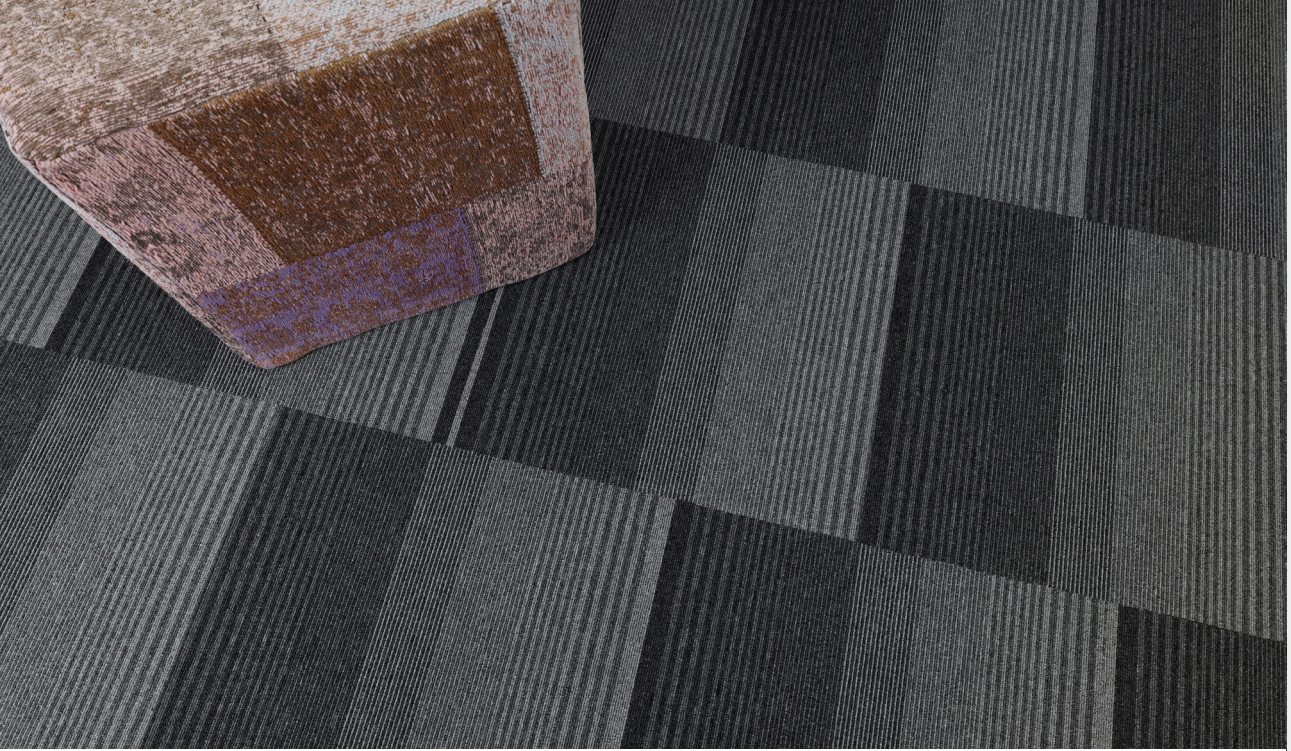

QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	$\pm 168000/m^2$ (163043/yd ²)
Pile Fibre	ISO 2424	100% Polypropylene
Pile Weight	ISO 8543	$360 \text{ gr}/m^2 \pm 5\%$ ($\pm 10 \text{ oz}/yd^2$)
Pile Height	ISO 1765	3.0 mm $\pm 5\%$
Primary Backing	ISO 2424	PA/PES non-woven
Tile Backing		Polyflex non-woven fabric
Total Thickness	ISO 1765	6.0 mm $\pm 5\%$
Total Weight	ISO 8543	$3790 \text{ gr}/m^2 \pm 7,5\%$ ($\pm 109 \text{ oz}/yd^2$)
Tile Size	EN 986	50 x 50 cm ($\pm 19.7'' \times 19.7''$)
Tiles per box		20
Use Classification	EN 1307	Light Contract Class 22
Abrasion		Pass
Vettermann Test	ISO 10361	Pass
Dimensional Stability	ISO 10361	Pass
Thermal Isolation		0.10 m ² K/W

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Cfl-SI
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES


Light		4.4
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo		4.8
Water	ISO 105 E01	4.8

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

MADRID LINES Serisi

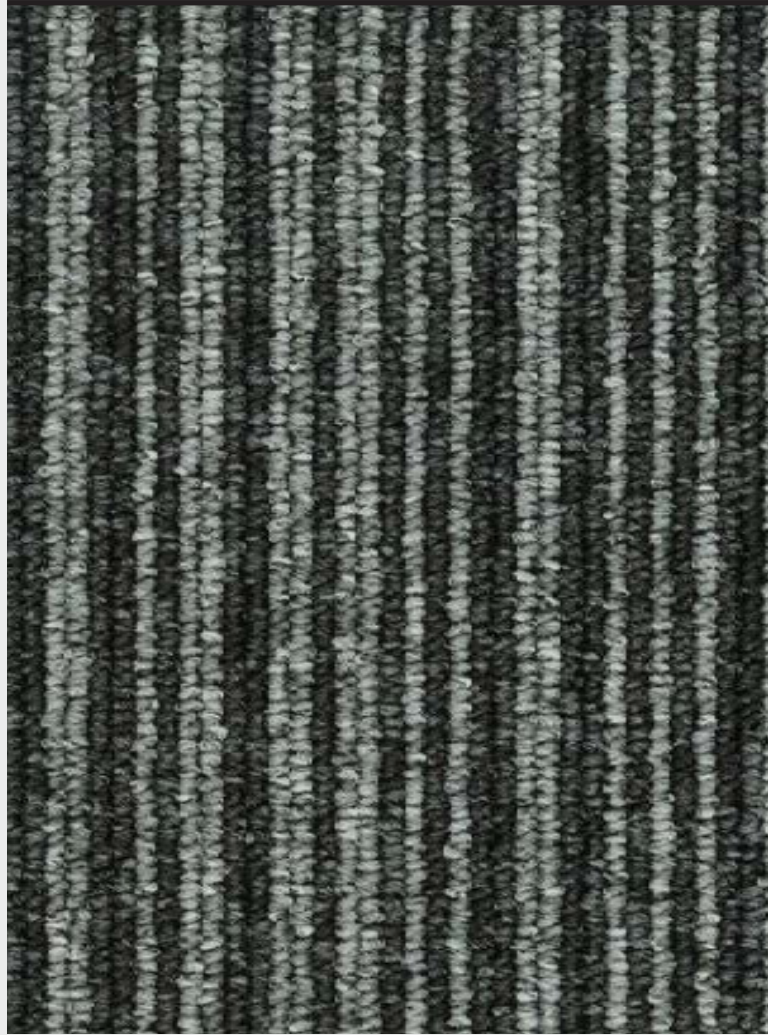

MADRID LINES 27873

275 m²

Karo Halılar MADRID LINES Serisi



QUALITY

Product Definition	ISO 2424	Tufted Loop Pile
Gauge		1/10"
No. of Tufts	ISO 1763	± 189600/m ²
Pile Fibre	ISO 2424	100% Solution Dyed Nylon
Pile Weight	ISO 8543	540 gr/m ² ± 5%
Pile Height	ISO 1765	3.0 mm ± 5%
Primary Backing	ISO 2424	PA/PES non-woven-Colback
Tile Backing		Polyflex
Total Thickness	ISO 1765	5.4 mm ± 5%
Total Weight	ISO 8543	4100 gr/m ² ± 7,5%
Tile Size	EN 986	50 x 50 cm (± 19.7" x 19.7") 20
Tiles per box		Heavy Contract Class 33
Use Classification	EN 1307	Pass
Abrasion		Pass
Vettermann Test	ISO 10361	0.08 m ² K/W
Dimensional Stability	ISO 10361	0.08 m ² K/W
Thermal Isolation		

ELEKTROSTATIC PROPERTIES

Static Loading	ISO 2424	Anti-static
Flame Properties		
Reaction to Fire	ISO 1763	Bfl-S1
Hot Metal Nut Test	EN130501-1	Low Radius

COLOUR FASTNESS PROPERTIES

Light		>5.0
Rubbing, Dry	ISO 105 B02	5.0
Rubbing, Wet	ISO 105 X12	5.0
Shampoo	ISO 105 E01	5.0
Water		4.5

GENERAL

Recommended Maintenance	
Pile Direction	
Laying Instructions	

Best results are obtained when cleaned with a dry shampoo method. Directional arrows are printed on the back of each tile. Best results are obtained when laid checkerboard. Tiles require no underlay, nailing, gluing or sewing and may be laid loose on a flat, dry, non-slippery floor. When tiles are laid on parquet, vinyl or in open areas larger than 30 m² it is advisable to use double sided adhesive tape on every 8th row or a tackifier.

GOLDEN COAST Serisi



GOLDEN COAST A-1 **4400 m²**



GOLDEN COAST A-2 **797 m²**



GOLDEN COAST A-3 **797 m²**



GOLDEN COAST A-5 **797m²**



GOLDEN COAST A-6 **797 m²**

Karo Halılar GOLDEN COAST Serisi



Golden Coast A1+A5



Golden Coast A1+A3



Golden Coast A1+A2



Golden Coast A1+A6

TEKNİK ÖZELLİKLER

Construction	Tufted Level Loop Pile
Gauge	1/12"
Yarn Type	100% PP
Pile Weight	460 gr/m ²
Pile Height	3.5 mm
Total Height	6.0 mm
Tile Backing	Bitumen
Tile Size	25 cm / 100 cm
Dye Method	Solution Dyed
Packing	22pcs Per Carton (5.5 m ²)

MOON Serisi



MOON 203

995 m²



MOON 205

2995 m²



MOON K235

2820 m²

Karo Halılar MOON Serisi



TEKNİK ÖZELLİKLER

Construction	Tufted Level Loop Pile
Gauge	1/10"
Yarn Type	100% BCF PP
Pile Weight	500 gr/m ²
Pile Height	3.0 mm
Total Height	5.0 mm
Tile Backing	Improved Bitumen
Tile Size	Solution Dyed
Dye Method	50 x 50 cm
Packing	20pcs Per Carton (5 m ²)

**myfloor acoustic
carpet flooring solutions**

www.mylfloor.com.tr

